




ENDETEK

A U S T R A L I A

ENDETEK

EDT-PP240

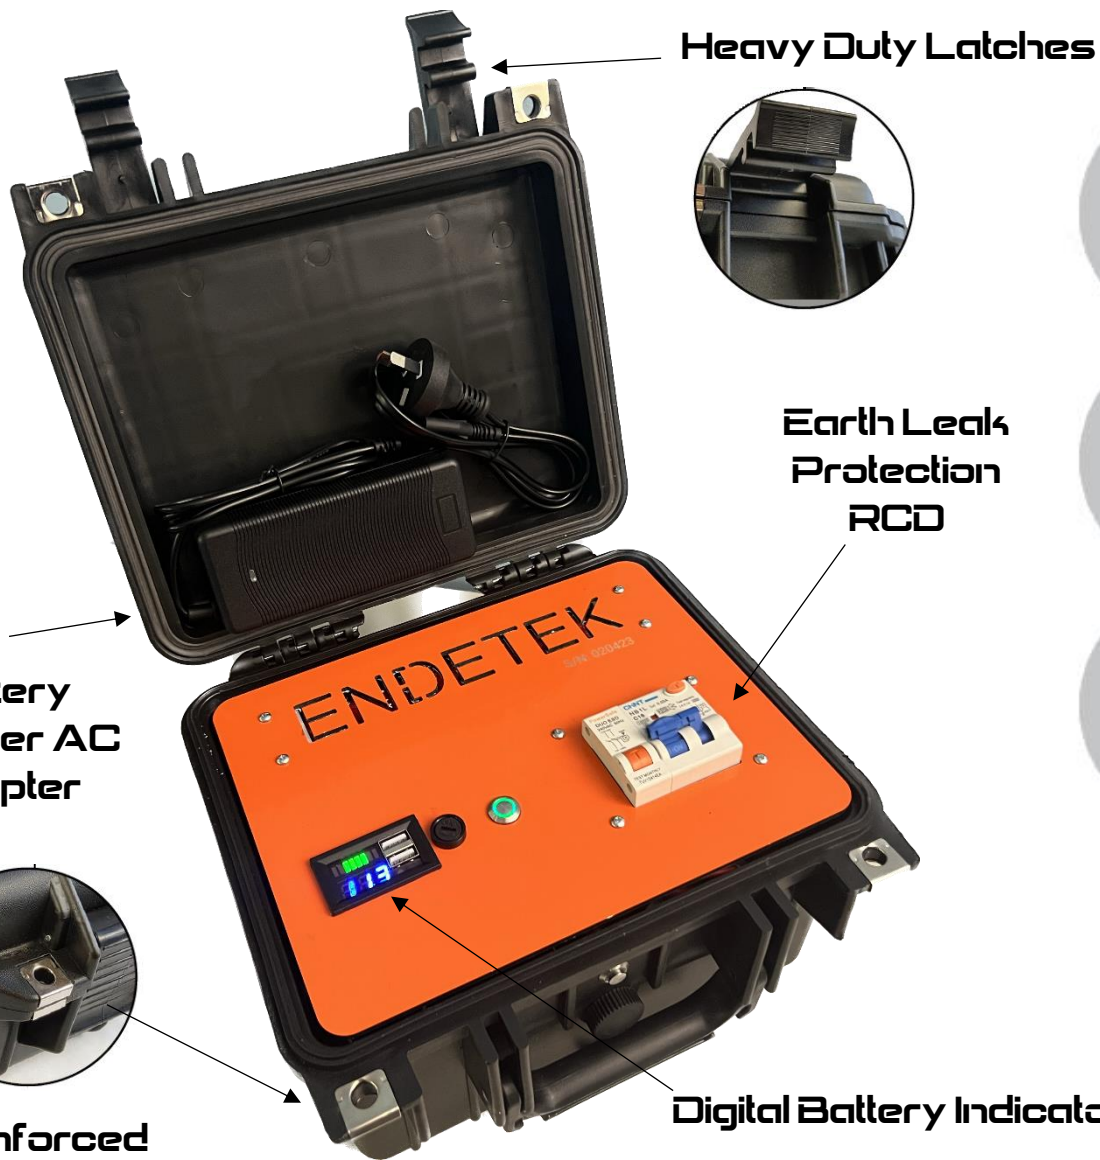

Heavy Duty Latches



WEATHER
PROOF
SEAL



SHOCK
RESISTANT



AIRLINE
READY



IP55

Earth Leak
Protection
RCD

Digital Battery Indicators
2 x USB Charging Ports

Battery
Charger AC
Adapter



Reinforced
Padlock Holes

Two accessory USB Charging Sockets rated at 2.1Amps each, power button for USB ports and safety fuse.

The Power safe RCD DUO offers a much broader range of protection by operating in various earthing environments. The RCD DUO is designed to isolate power in the occurrence of a fault to earth on multiple earthed neutral (MEN) and IT type systems. Earth Fault Protection on IT, TT & MEN type systems



IMPORTANT

Charging Input Socket with **VOLTAGE** overload



POWER OUTPUT 240V Output @ 600w



Transport Case Dimensions

- External Dimensions: 265 x 240 x 175 mm
- Internal Dimensions:
- Top of the Case: 235 x 180mm
- Base of the Case: 235 x 180mm
- Depth of Base: 120mm
- Depth of Lid: 30mm
- Meet TSA airline Safe Requirements
- System Weight 3.9 Kg

AC - Inverter

Power:	600W
Surge Power:	1500W
Output Waveform:	Modified sine wave (THD<3%)
Output Frequency:	50Hz±0.1%
AC Output Voltage:	240VAC
Voltage Range:	10V-15V
Low Voltage Alarm:	10.0V± 0.5V
Over Temp Protection:	< 65°C
No Load Consumption:	< 0.7A
DC - USB Battery & Charger V1 & V2	
Voltage:	11.1V Nominal, 12.6V Full Charge
V1 Capacity: 6Ah or 66Wh Per Battery, 132Wh Total	V2 Capacity: 9Ah or 99Wh Per Battery, 198Wh Total
V1 Runtime: 4-6 Hours @ 25% Duty Cycle, Yoke Dependant	V2 Runtime: 6-8 Hours @ 25% Duty Cycle, Yoke Dependant
V1 Charge Time: 4 Hours with supplied 3A Charger	V2 Charge Time: 6 Hours with supplied 3A Charger
USB Output:	Dual 5VDC @2.1A Max each
Battery Type:	Lithium Nickel Cobalt Re-Charge Batt

Contact details below for more information or to place an order:

ENDETEK Australia Pty Ltd

8/2 Apollo St, Warriewood NSW 2102

Ph: 02 9979 8777 or email us: sales@endetek.com.au