




PBU 350

PORTABLE MAGNETIC PARTICLE INSPECTION BENCH

FEATURES

- + Only requires a 13 Amp supply.
- + Working Ranges: Current Flow 1000 AMPS AC RMS (1800Amps Peak equivalent). HWDC 700 AMPS Twice Mean (=MagAmps), 350Amps Mean equivalent.
- + Optional Current Pre-Selection system.
- + Stainless steel construction.
- + Compact with integral Power Pack.
- + AC / HWDC magnetising.
- + Shot times of 1, 2 and 3 seconds as standard (dual shot times also available)
- + Demagnetisation cycle.
- + Gas spring pressure on Headstock & Manual Locking Tailstock.
- + Current Flow - copper braid contact pads & V-block supports.

- + Optional Flux Flow.
- + Footswitch for ease-of-use.
- + Optional "Bi-Directional" Coils.

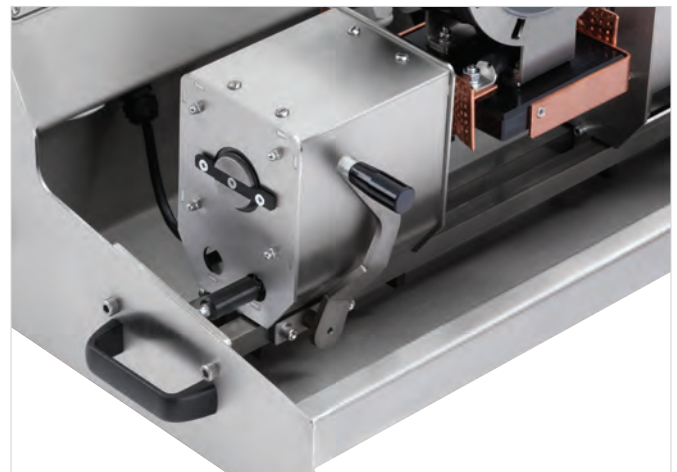

Gas Spring Pressure On Headstock for optimum electrical contact with the component under test.

AUTHORISED DISTRIBUTOR


The PBU 350 Portable Magnetic Particle Inspection (MPI) Bench Unit offers great MPI performance teamed with the outstanding quality that Baugh & Weedon is known for. With a long rich history of designing and building MPI benches of all sizes, it is fitting that we have added the portable bench option to our range.

As well as the key features, there are various aspects of the PBU design that set it apart in the marketplace including the ability to add an

inking system to the unit offering maximum flexibility to the inspector.

The PBU uses a gas spring to provide the clamping pressure on the headstock that ensures optimum electrical contact with the component under test.

We have also developed the coil to offer bi-directional clamping allowing the coil to be manually rotated at 90° for maximum inspection flexibility.

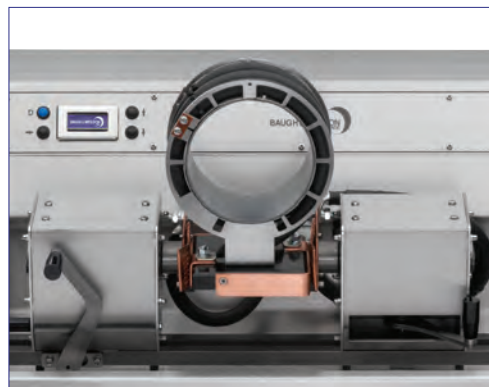

SPECIFICATION

Current Waveforms	AC, HWDC as standard with Single Phase FWDC as optional
Dimensions	800mm x 550mm x 380mm
Output	Current Flow 1000 AMPS AC RMS (1800Amps Peak equivalent) HWDC 700 AMPS Twice Mean (=MagAmps), 350 Amps Mean equivalent
Power Input	220V-10 Amps. (Dual voltage version available, 110V-30 amps/220V-10Amps)
Max Component Length	Up to 350mm
Metering	Digital
Contact Pads	50mm x 60mm Braided Copper Pads
Clamping	Headstock with gas spring pressure clamping and manually locked tailstock
Coil Option	100 or 150mm Diameter 3 turn Copper Coil
Flux Flow Option	Coils in Head & Tailstock powered by FWDC - max output 20000 Amp Turns
Demag Cycle	Current Flow - Decaying AC demag cycle. Flux Flow - Low frequency, reversing polarity, decaying current.
Weight	Approx 80kg
Calibrated	Traceable Calibration with Certificate
Shot Time	Selection 1, 2 & 2x1 second (other options available)

Specification could change without notice. If you have any questions regarding this specification, please contact sales@bw-nde.com



Document number BR1025: Issue 3

AUTHORISED DISTRIBUTOR



02 9979 8777
Offices in Sydney + Perth

sales@endetek.com.au
www.endetek.com.au

Baugh & Weedon Ltd.
www.bw-nde.com